




Illumibend 24 LED 12 Volt DC Red

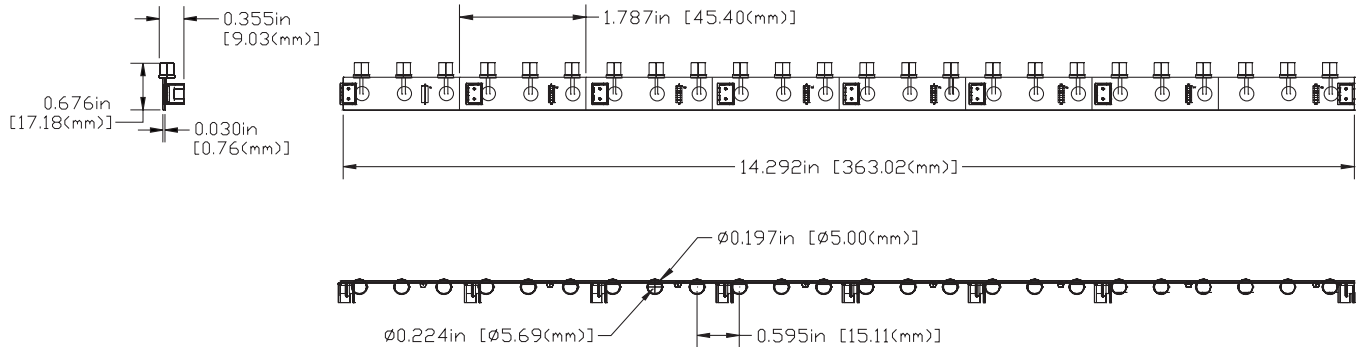

BASIC PRODUCT INFORMATION

Description	Bendable strip light with (24) 5mm LEDs and 8 connection points, Red	Width (inches)	0.355"	Width (metric)	9.017mm
Suggested Mounting Method	<ul style="list-style-type: none"> • Double sided tape • Mounting Clip • Velcro 	Length (inches)	14.292"	Length (metric)	363.02mm
Features	<ul style="list-style-type: none"> • LED spacing (center to center) 0.593" (15.07mm) • Cuttable every third LED (cut marks indicated), 1.787" (45.4 mm) from initial connection point • Bendable LED head 	Height (inches)	0.676"	Height (metric)	17.17mm
		Weight (lbs.)	0.6 oz.	Weight (kg)	17.01 g
		Parts & Accessories	#ILBCONN - Illumibend 3" Connector Wire #ILBCLIP - Illumibend Mounting Clip		

SPECIFICATIONS

Operating Voltage	12 Volts DC, 0.136A
Power Consumption	1.6 Watt
Protection Rating	IP45
Relative Humidity	Dry
Cooling	Convection
Operating Temperature	-40°C to 70°C
Color Wavelength	620~625 nm
Bin Tolerance	+/- 30 nm (tighter binning available upon request)
Beam Angle Adjustment	Fixture Angle is adjustable by tilting individual LEDs to desired position
LED Beam Angle	80°

ILLUMINANCE CHART

