




LED Ribbonlyte 12 Volt DC Ultra Violet

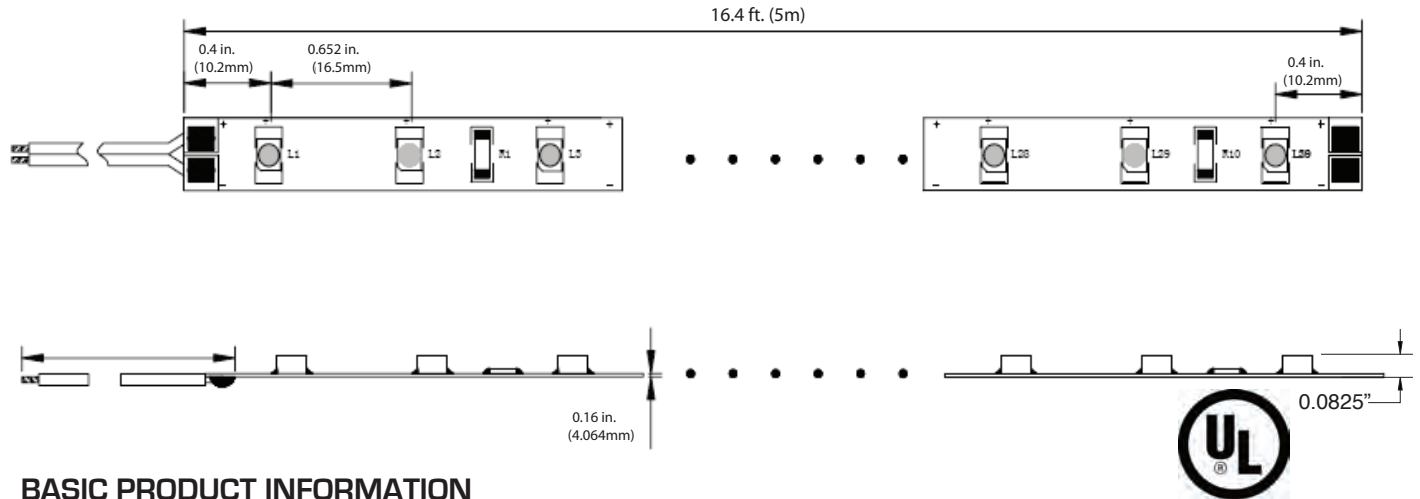

BASIC PRODUCT INFORMATION

Description	Flexible strip light with high brightness 1 chip LED, Ultra Violet	Width (inches)	0.315"	Width (metric)	8mm
Suggested Mounting Method	• Double sided tape	Length (inches)	16 ft. / roll	Length (metric)	5m / roll
Features	<ul style="list-style-type: none"> • LED spacing (center to center) 0.652" (16.5mm) • Cuttable every third LED, 2" (50.8 mm) from initial connection point • Sold by the foot, 16 feet / roll • Adhesive backing • UL Listed # E317073 	Height (inches)	0.0825"	Height (metric)	2.1mm
		Weight (lbs.)	0.23 oz. / ft.	Weight (kg)	21.40 g / m
		Parts & Accessories	#IP67CFCNN - IP67 Clear Female Connector #IP67CMCONN - IP67 Clear Male Connector		

SPECIFICATIONS

Operating Voltage	12 Volts DC
Power Consumption	1.224 Watt / linear ft. (~90 mA/ft.)
Protection Rating	IP45
Relative Humidity	Dry
Cooling	Convection
Operating Temperature	-40°C to 70°C
Color Temperature	390~415 nm
Bin Tolerance	+/- 30 nm (tighter binning available upon request)
Beam Angle Adjustment	N/A
LED Beam Angle	120°