



Solder Less Paper LED Ribbonlyte 12 Volt DC White 5500K

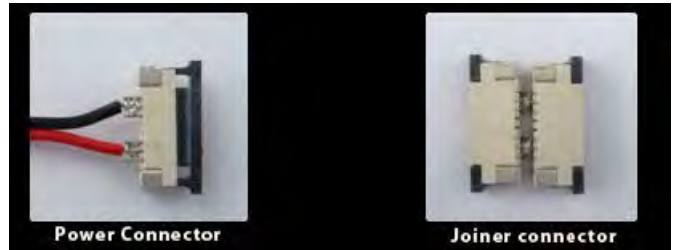

BASIC PRODUCT INFORMATION

Description	Waterproof flexible strip light with high brightness 1 chip LED, White 5500K - (390) LEDs per 5 meters
Suggested Mounting Method	<ul style="list-style-type: none"> • Double sided 3M tape (included on backing) • Decorative channel • Tilttable standoffs • Ribbonlyte Harness
Features	<ul style="list-style-type: none"> • Cutable every third LED, 1.46" (37.2 mm) from initial connection point • Sold by the foot, 16 feet / roll • Solder less connection points • Flexible • UL Listed # E317073

Width (inches)	0.314"	Width (metric)	8mm
Length (inches)	16 ft. / roll	Length (metric)	5m / roll
Height (inches)	0.0866"	Height (metric)	2.2mm
Weight (lbs.)	0.7 oz. / ft.	Weight (kg)	65.088 g / m

- Parts & Accessories**
- #RBNLCOMPCON - Joiner Connector
 - #RBNLCOMPCON - Jumper Connector
 - #RBNLCOMPCON - Power Connector
 - #RBNLMNT - Mounting Clip with Screwdown
 - #RBNLCHNLXXX - Decorative Channel
 - #STLPST - Striplyte Tilttable Stands

SPECIFICATIONS

Operating Voltage	12 Volts DC
Power Consumption	1.224 Watt / linear ft. (~102 mA/ft.) 0.204 Watt / 3 LED branch (16~19 mA / branch)
Protection Rating	IP44
Relative Humidity	Dry
Cooling	Convection
Operating Temperature	-40°C to 70°C LEDs can withstand junction temperature up to 100°C, resin may melt at 80°C
Color Temperature	5500K
Bin Tolerance	+/- 200K
Beam Angle Adjustment	180°, when used with Tilttable standoffs
LED Beam Angle	120°
Additional Notes	

ILLUMINANCE CHART (every 12 inches)

