




LED Ribbonlyte Extreme 12 Volt DC Amber

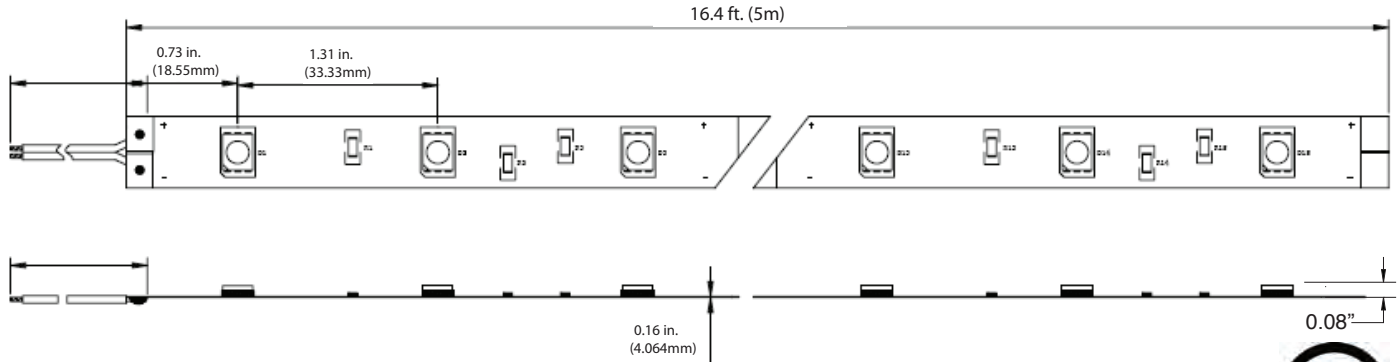

BASIC PRODUCT INFORMATION

Description	Flexible strip light with ultra high brightness 3 chip LED, Amber	Width (inches)	0.394"	Width (metric)	10mm
Suggested Mounting Method	• Double sided tape	Length (inches)	16 ft. / roll	Length (metric)	5m / roll
Features	<ul style="list-style-type: none"> • LED spacing (center to center) 1.31" (33.33mm) • Cutable every third LED, 3.84" (97.3 mm), from initial connection point • Sold by the foot, 16 feet / roll • Adhesive backing • UL Listed # E317073 	Height (inches)	0.079"	Height (metric)	2mm
		Weight (lbs.)	0.23 oz. / ft.	Weight (kg)	21.40 g / m
		Parts & Accessories	#IP67CFCOON - IP67 Clear Female Connector #IP67CMCONN - IP67 Clear Male Connector		

SPECIFICATIONS

Operating Voltage	12 Volts DC
Power Consumption	1.68 Watt / linear ft. (~140 mA/ft.)
Protection Rating	IP45
Relative Humidity	Dry
Cooling	Convection
Operating Temperature	-40°C to 70°C
Color Temperature	585~590 nm
Bin Tolerance	+/- 30 nm (tighter binning available upon request)
Beam Angle Adjustment	N/A
LED Beam Angle	100°
Additional Notes	Each individual LED die on the three die chip runs on 16~19mA maximum