




**LED Ribbonlyte Extreme 12 Volt DC Green**

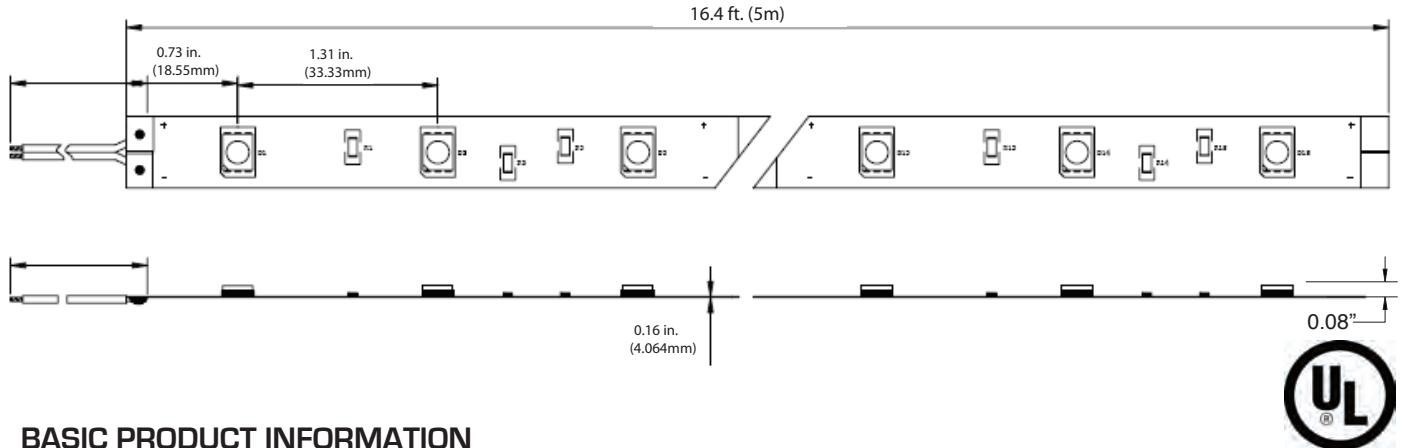

**BASIC PRODUCT INFORMATION**

<b>Description</b>	Flexible strip light with ultra high brightness 3 chip LED, Green	<b>Width (inches)</b>	0.394"	<b>Width (metric)</b>	10mm
<b>Suggested Mounting Method</b>	• Double sided tape	<b>Length (inches)</b>	16 ft. / roll	<b>Length (metric)</b>	5m / roll
<b>Features</b>	<ul style="list-style-type: none"> <li>• LED spacing (center to center) 1.31" (33.33mm)</li> <li>• Cuttable every third LED, 3.84" (97.3 mm), from initial connection point</li> <li>• Sold by the foot, 16 feet / roll</li> <li>• Adhesive backing</li> <li>• UL Listed # E317073</li> </ul>	<b>Height (inches)</b>	0.079"	<b>Height (metric)</b>	2mm
		<b>Weight (lbs.)</b>	0.23 oz. / ft.	<b>Weight (kg)</b>	21.40 g / m
		<b>Parts &amp; Accessories</b>	#IP67CFCOON - IP67 Clear Female Connector #IP67CMCOON - IP67 Clear Male Connector		

**SPECIFICATIONS**

<b>Operating Voltage</b>	12 Volts DC
<b>Power Consumption</b>	2.04 Watt / linear ft. (~168 mA/ft.)
<b>Protection Rating</b>	IP45
<b>Relative Humidity</b>	Dry
<b>Cooling</b>	Convection
<b>Operating Temperature</b>	-40°C to 70°C
<b>Color Temperature</b>	515~520 nm
<b>Bin Tolerance</b>	+/- 30 nm (tighter binning available upon request)
<b>Beam Angle Adjustment</b>	N/A
<b>LED Beam Angle</b>	100°
<b>Additional Notes</b>	Each individual LED die on the three die chip runs on 16~19mA maximum