




Striptyte™ 25 LED 120 Volt AC Very Warm White 2700K

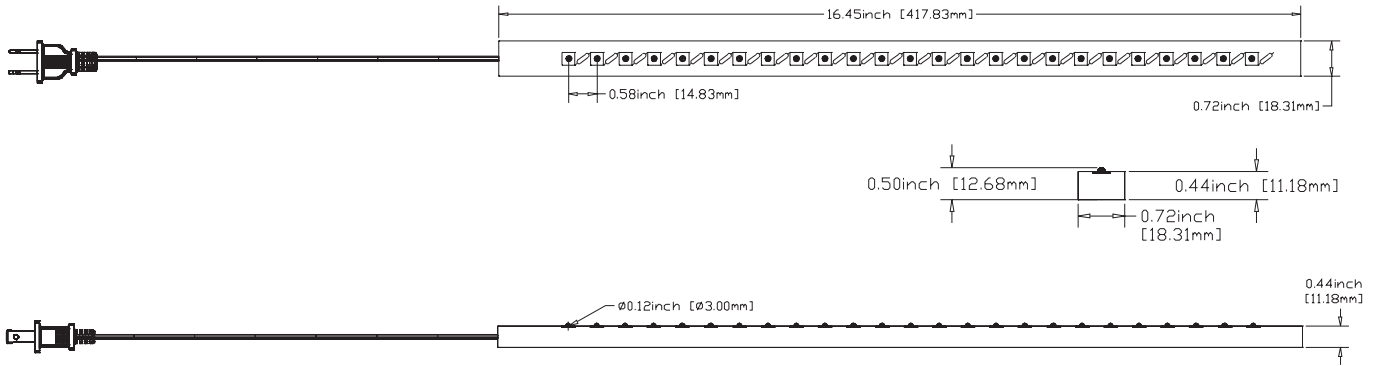

BASIC PRODUCT INFORMATION

Description	Rigid resin encased strip light 120 Volt AC 25 LED, Very Warm White 2700K	Width (inches)	0.72"	Width (metric)	18.288mm
Suggested Mounting Method	<ul style="list-style-type: none"> • Double sided tape or Velcro • Gardner bender staple • Tilttable standoffs 	Length (inches)	16.45"	Length (metric)	417.83mm
Features	<ul style="list-style-type: none"> • LED spacing (center to center) 0.58" (14.83mm) • 2-prong plug with 6ft. cord • Low power consumption - 2.0 Watt • UL Listed # E317073 	Height (inches)	0.5"	Height (metric)	12.7mm
		Weight (lbs.)	7.5 oz.	Weight (kg)	212.617 g
		Parts & Accessories	#STLPST - Striptyte Tilttable Stand		

SPECIFICATIONS

Operating Voltage	120 Volts AC, 60 Hz, 0.019A
Power Consumption	2.0 Watt
Protection Rating	IP45
Relative Humidity	Dry Only
Cooling	Convection
Operating Temperature	-40°C to 70°C
Color Temperature	2700K
Bin Tolerance	+/- 500K (tighter binning available upon request)
Beam Angle Adjustment	180°, when used with Tilttable standoffs
LED Beam Angle	50°
Additional Notes	Striptyte is NOT cuttable and NOT submersible

ILLUMINANCE CHART

