




Striplyte™ 25 LED 12 Volt DC Amber

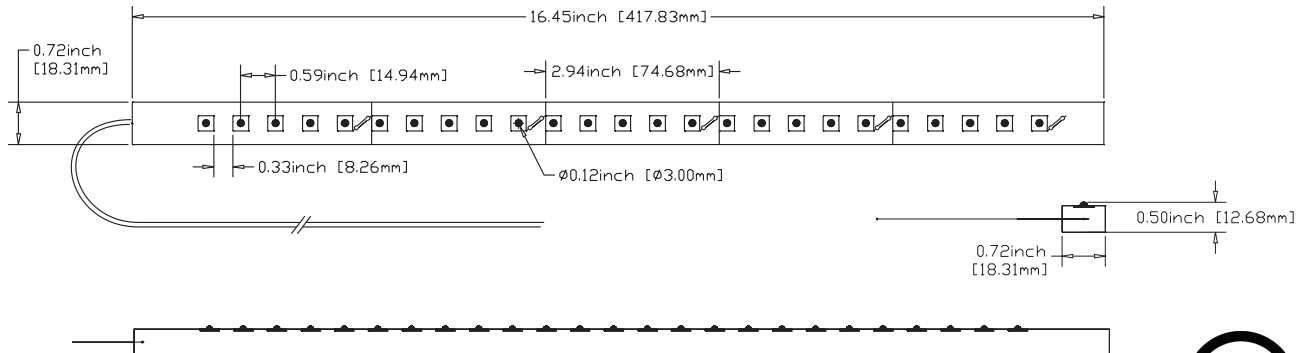

BASIC PRODUCT INFORMATION

Description	Rigid resin encased strip light 12 Volt DC 25 LED, Amber	Width (inches)	0.72"	Width (metric)	18.288mm
Suggested Mounting Method	<ul style="list-style-type: none"> • Double sided tape or Velcro • Gardner bender staple • Tilttable standoffs 	Length (inches)	16.45"	Length (metric)	418mm
Features	<ul style="list-style-type: none"> • LED spacing (center to center) 0.568" (14.42mm) • 6ft. bare tinned leads • Cuttable every fifth LED, 2.94" (74.67mm), from end with leads • UL Listed # E317073 	Height (inches)	0.501"	Height (metric)	12.725mm
		Weight (lbs.)	4.3 oz.	Weight (kg)	121.9 g
		Parts & Accessories	<ul style="list-style-type: none"> • #STLPST - Striplyte Tilttable Stand • #LEDDRV5 - LED Driver 5 Amp • #LH4C6L - Light Harness • #BATHARN - Battery Harness 		

SPECIFICATIONS

Operating Voltage	12 Volts DC, 0.085A
Power Consumption	1.02 Watt
Protection Rating	IP65
Relative Humidity	Wet & Dry
Cooling	Convection
Operating Temperature	-40°C to 70°C
Color Wavelength	585~590 nm
Bin Tolerance	+/- 30 nm (tighter binning available upon request)
Beam Angle Adjustment	180°, when used with Tilttable standoffs
LED Beam Angle	50°
Additional Notes	<ul style="list-style-type: none"> • Can be made IP67 or submersible if connection leads are sealed and kept away from liquid. • After cutting, use silicone to seal the cut end. Reference cutting instructions for further detail.

ILLUMINANCE CHART

