


Striplyte™ 50 LED 120 Volt AC Green

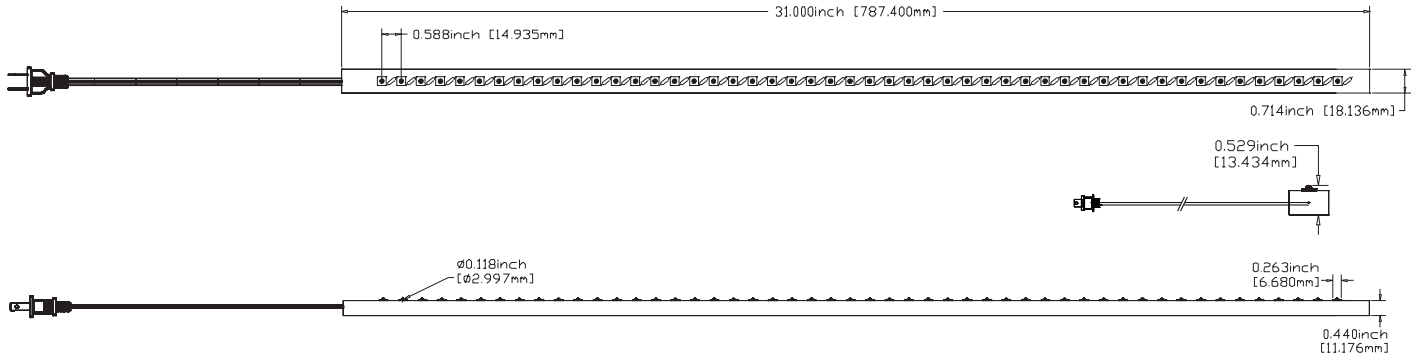

BASIC PRODUCT INFORMATION

Description	Rigid resin encased strip light 120 Volt AC 50 LED, Green	Width (inches)	0.714"	Width (metric)	18.136mm
Suggested Mounting Method	<ul style="list-style-type: none"> • Double sided tape or Velcro • Gardner bender staple • Tilttable standoffs 	Length (inches)	31"	Length (metric)	787.4mm
Features	<ul style="list-style-type: none"> • LED spacing (center to center) 0.588" (14.93mm) • 2-prong plug with 6ft. cord • Low power consumption - 4.0 Watt • UL Listed # E317073 	Height (inches)	0.529"	Height (metric)	13.434
		Weight (lbs.)	7.5 oz.	Weight (kg)	212.617 g
		Parts & Accessories	#STLPST - Striplyte Tilttable Stand		

SPECIFICATIONS

Operating Voltage	120 Volts AC, 60 Hz, 0.038A
Power Consumption	4.0 Watt
Protection Rating	IP45
Relative Humidity	Dry Only
Cooling	Convection
Operating Temperature	-40°C to 70°C
Color Wavelength	515~520 nm
Bin Tolerance	+/- 30 nm (tighter binning available upon request)
Beam Angle Adjustment	180°, when used with Tilttable standoffs
LED Beam Angle	50°
Additional Notes	Striplyte is NOT cuttable and NOT submersible

ILLUMINANCE CHART

